


ducting express

high density acoustic insulation material, is made of polyurethane foam. Because of its non flammability feature, it does not allow melting, formation of liquid drops or changes in its mineral structure. It does not contain halogen, heavy metals and it does not get moldy when exposed to humidity.

SOUND ABSORPTION COEFFICIENT GRAPH

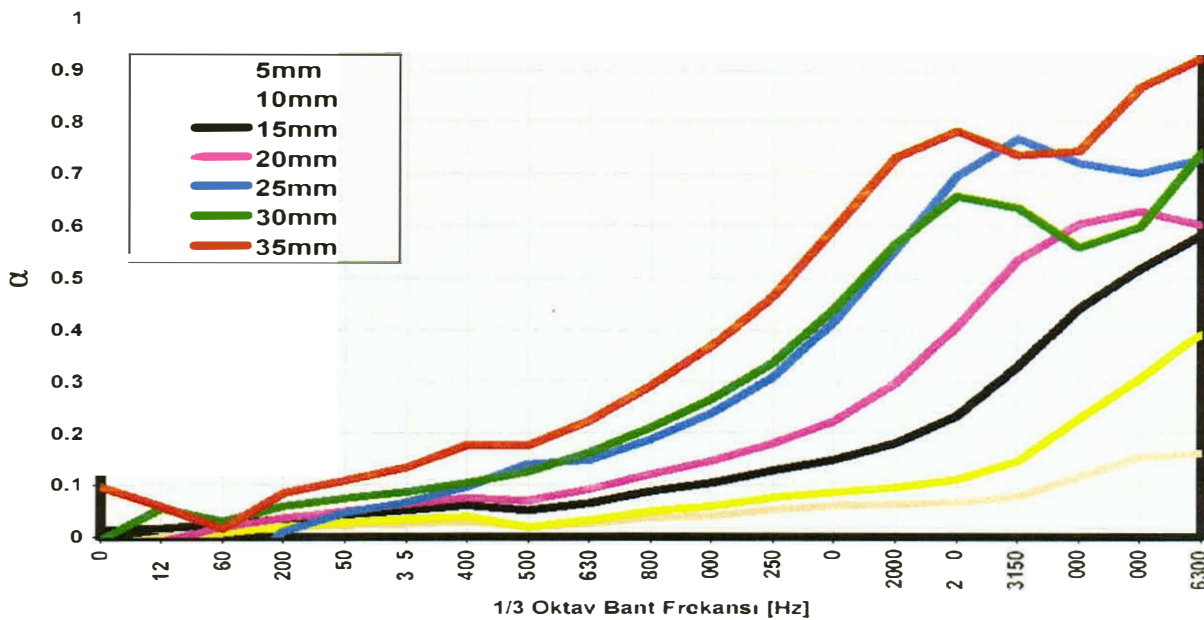

PHYSICAL CHARACTERISTICS

	Unit	Value	Standard
Color		Black	
Density	kg/ m3	70-90	ISO 1855
Hardness	N	>300	ISO 2439 (ILD % 40)
Tensile Strength	kpa	>85	ISO 1798
Elongation at Break	%	>85	ISO1798
Flame Behavior		Class 0 Class 1	BS 476 Part 6 BS 476 Part 7