

Technical Data Sheet

CODE 16039

CA 250 V0 E

In-line centrifugal fans in self-extinguishing plastic



Certifications




IMQ Performance



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,40	Voltage (V)	220-240
Absorbed Power max (W)	90	Weight (Kg)	4,3
Frequency (Hz)	50/60	Delivery max (l/s)	256
Insulation Class	II°	Delivery max (m³/h)	920
IP	44	Pressure max (mmH2O)	42
Max absorbed Power at 60Hz (W)	120	Pressure max (Pa)	412
Max ambient temperature for continuous operation (°C)	50	RPM	2650
Nominal Diameter (mm)	250	Sound Pressure level Lp [dB (A)] 3m	49,9

DIMENSIONS

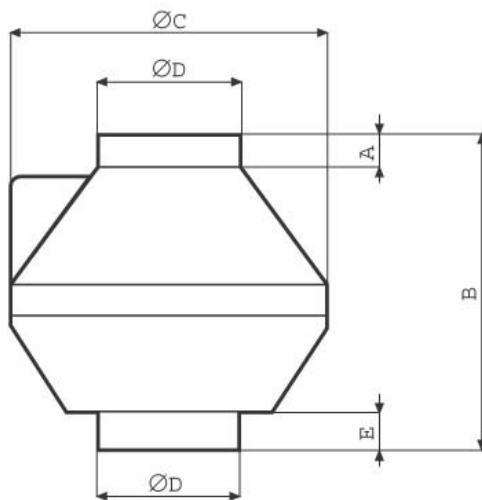

Etichetta Energetica	NO
Size A (mm)	340
Size B (mm)	305
Size C (mm)	340
Size D (mm)	247
Size E (mm)	60
Size F (mm)	30

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 16039

CA 250 V0 E


In-line centrifugal fans in self-extinguishing plastic



DESCRIPTION

- Material: self-extinguishing PP thermoplastic resin, rated V0.
- Nominal diameter 250 mm
- 1 speed AC motor with thermal overload cutout and shaft turning in ball bearings, coupled to backward curved impeller.
- Maximum air flow 920 m³/h
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controller

CURVES

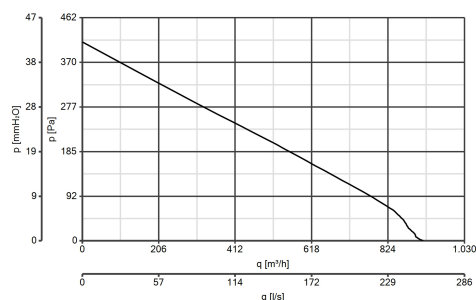

ACCESSORIES



C 2.5
(COMANDO EL.
2.5 A)
Code 12967



SCNRB
SCAT.COM.NON
REV.INCASSO
Code 12971



KIT SCB
(TRASF.E.C.)
Code 22481



LINEO-G 250
Code 22706

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com