



7x19 is very popular in diameters from 3mm to 16mm and is used on a variety of applications. This rope is very flexible in diameters 3mm to 6mm and is used for many requirements where wire ropes are running over pulleys.



R.H.O.L

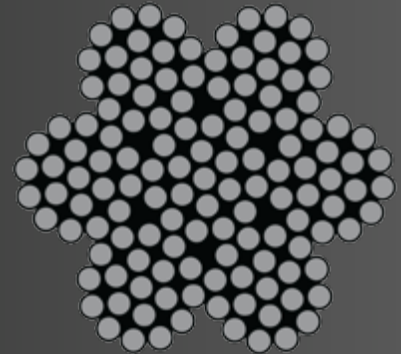

Pulley Suitable



Galvanised

Breaking Load Table

Nominal Diameter [mm]	Approximate Mass [kg/m]	Minimum breaking loads - 1770 Mpa	
		[kN]	[kg]
3	0.034	5.77	588
4	0.061	10.25	1,045
5	0.095	16.02	1,633
6	0.137	23.07	2,352
7	0.187	31.40	3,202
8	0.244	41.01	4,182
9	0.309	51.90	5,293
10	0.381	64.07	6,535
11	0.461	77.53	7,908
12	0.549	92.27	9,411
13	0.644	108.29	11,045
14	0.747	125.59	12,809
16	0.975	164.03	16,731
18	1.234	207.60	21,175
20	1.524	256.30	26,142