



Data Sheet

Wirehanger

An all steel , hammer in fixings offering increased fire resistance.
Suitable for use in concrete, masonry and some natural stone.
Zinc plated and yello passivated min 5µm

Hammer In Fixing

Pull down expansion



Through Fixing

Anchor Diameter	mm	6.0
Anchor Length	mm	55.0
Eye Diam.	mm	6.0
Drill Hole Diam	mm	6.0
Min. Hole Depth	mm	40.0
Rec. Tensile Loads	kN	1.5


Loads are for 30 N/mm² Concrete

Wire Hangers are suitable for use in solid concrete, hard concrete blocks, hard natural stone and some solid bricks.

Typical Applications:

Suspended Ceiling Hangers, Suspended cables, Bird wires.

Installation Instructions

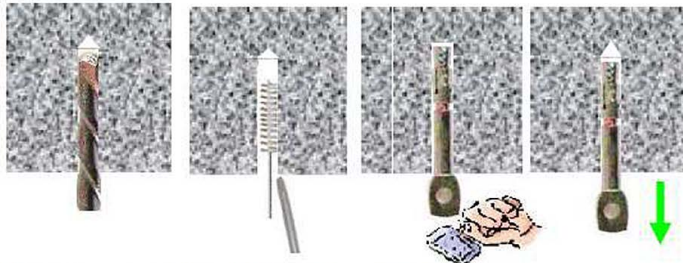

1. Drill correct diameter hole to correct depth in base material.
2. Clean hole by brushing and blowing
3. Hammer in Wirehanger and pull firmly down