


ducting express

Belt-Driven Axial Flow Fans

Cylindrical cased axial flow fans with motor located externally to the fan casing and incorporating a belt driven impeller. These fans have been designed for, but not limited to, use with our Dry Filter Spray Booths.

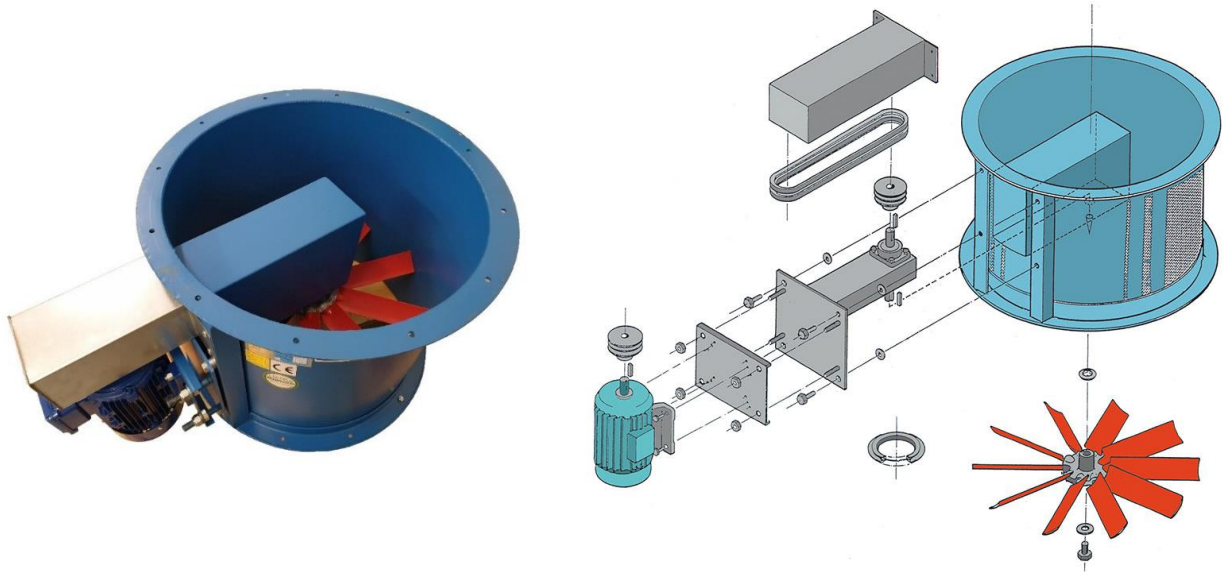

630mm diameter

	Motor	kW	M3/sec (@125Pa)	Ft3/min (@1/2"W.G.)
BDA1.5/3PH	3 phase	1.5	4.05	8600
BDA2.2/3PH	3 phase	2.2	5.1	10800
BDA3/3PH	3 phase	3.0	5.71	12150
BDA1.5/1PH	Single phase	1.5	4.05	8600
BDA2.2/1PH	Single phase	2.2	5.1	10800

710mm diameter

	Motor	kW	M3/sec (@125Pa)	Ft3/min (@1/2"W.G.)
710BDA4/3PH	3 phase	4.0	7.0	14850
710BDA5.5/3PH	3 phase	5.5	8.3	17600

800mm diameter

	Motor	kW	M3/sec (@125Pa)	Ft3/min (@1/2"W.G.)
800BDA5.5/3PH	3 phase	5.5	9.7	20550
800BDA7.5/3PH	3 phase	7.5	11.0	23300