


Express Duct 90° Bend					
Diameter (D) mm	Radius (R) mm	Over Turnout (T) mm	End Piece (EP) mm	Centre Height (h)mm	Overall Height (H) mm
80	80	92	40	120	166
100	100	112	40	140	196
125	125	137	40	165	233.5
150	150	162	40	190	271
160	160	172	40	200	286
180	180	192	40	220	316
200	200	212	40	240	346
224	224	236	40	264	382
250	250	262	60	310	441
300	300	312	60	360	516
315	315	327	60	375	538.5
350	350	362	60	410	591
400	400	412	80	480	686
450	450	462	80	530	761
500	500	512	80	580	836

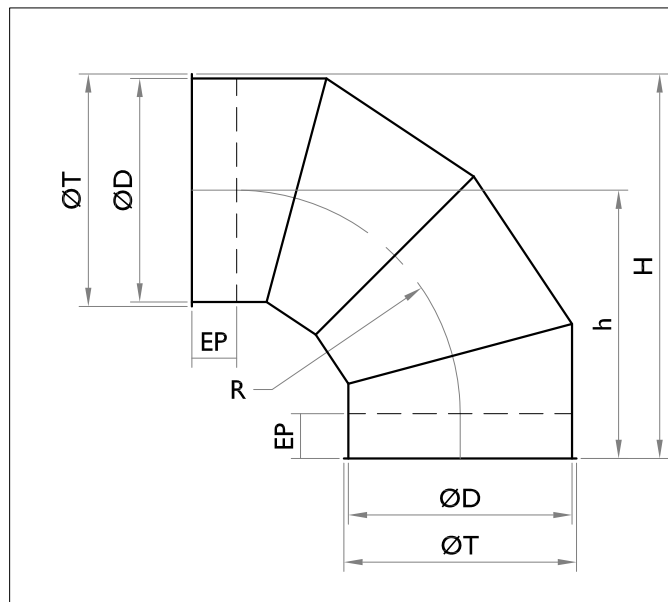

Designed to provide a smoother internal bore & simply clip the components together, Express Duct will save time on installation & make replacing parts simple. This ducting can be easily dismantled for cleaning purposes & replacing worn parts. The use of the quick clamps reduces leakage, this results in improved airflow.