


Express Duct 60° Bend				
Diameter (D) mm	Radius (R) mm	Over Turnout (T) mm	End Piece (EP) mm	Offset (O) mm
80	80	92	40	149
100	100	112	40	169
125	125	137	40	194
150	150	162	40	219
160	160	172	40	229
180	180	192	40	249
200	200	212	40	269
224	224	236	40	293
250	250	262	60	354
300	300	312	60	404
315	315	327	60	419
350	350	362	60	545
400	400	412	80	539
450	450	462	80	589
500	500	512	80	639

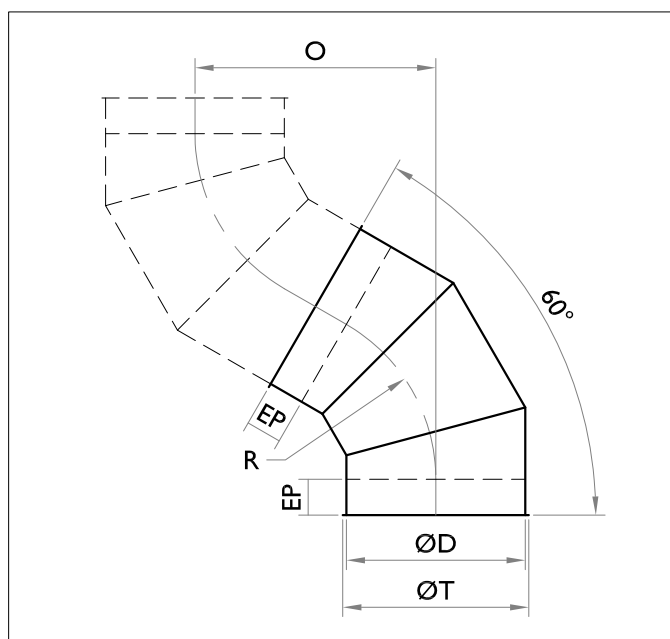

Designed to provide a smoother internal bore & simply clip the components together, Express Duct will save time on installation & make replacing parts simple. This ducting can be easily dismantled for cleaning purposes & replacing worn parts. The use of the quick clamps reduces leakage, this results in improved airflow.