


## Express Duct 45° Bend

Diameter (D) mm	Radius (R) mm	Over Turnout (T) mm	End Piece (EP) mm	Offset (O) mm
80	80	92	40	103
100	100	112	40	115
125	125	137	40	125
150	150	162	40	144
160	160	172	40	150
180	180	192	40	162
200	200	212	40	174
224	224	236	40	188
250	250	262	60	231
300	300	312	60	261
315	315	327	60	269
350	350	362	60	290
400	400	412	80	347
450	450	462	80	377
500	500	512	80	406

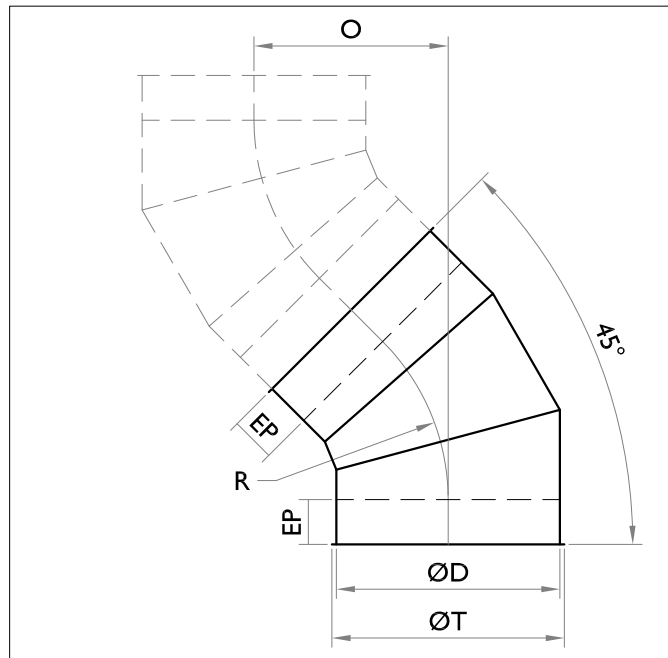

Designed to provide a smoother internal bore & simply clip the components together, Express Duct will save time on installation & make replacing parts simple. This ducting can be easily dismantled for cleaning purposes & replacing worn parts. The use of the quick clamps reduces leakage, this results in improved airflow.