


## Express Duct 30° Bend

Diameter (D) mm	Radius (R) mm	Over Turnout (T) mm	End Piece (EP) mm	Offset (O) mm
80	80	92	40	61
100	100	112	40	67
125	125	137	40	73
150	150	162	40	80
160	160	172	40	83
180	180	192	40	88
200	200	212	40	94
224	224	236	40	100
250	250	262	60	127
300	300	312	60	140
315	315	327	60	144
350	350	362	60	154
400	400	412	80	187
450	450	462	80	201
500	500	512	80	214

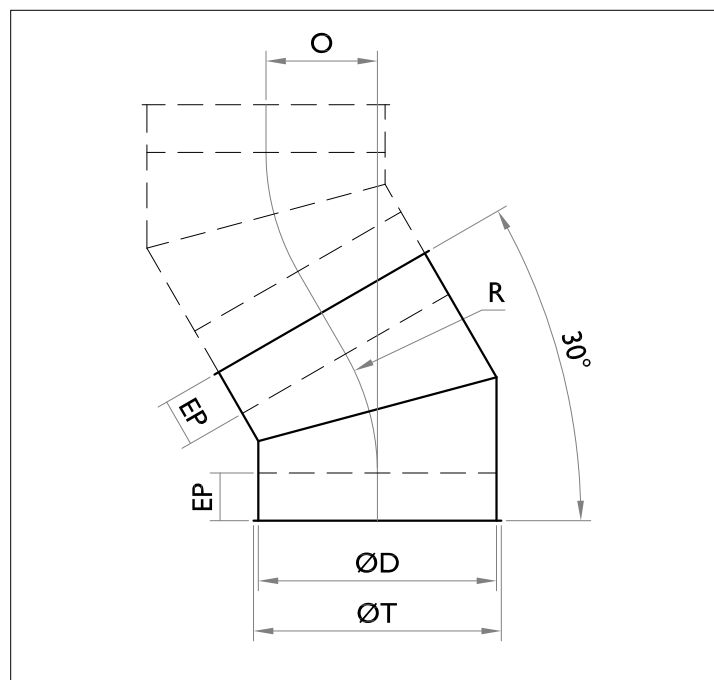

Designed to provide a smoother internal bore & simply clip the components together, Express Duct will save time on installation & make replacing parts simple. This ducting can be easily dismantled for cleaning purposes & replacing worn parts. The use of the quick clamps reduces leakage, this results in improved airflow.