

## Body of the reducer

A - B x 2 (Largest diameter minus smallest, multiplied by 2)


## Length of the collars

80mm to 224mm - 20mm long

250mm to 355mm - 60mm long

381mm to 630mm - 80mm long

660mm+ - 100mm long

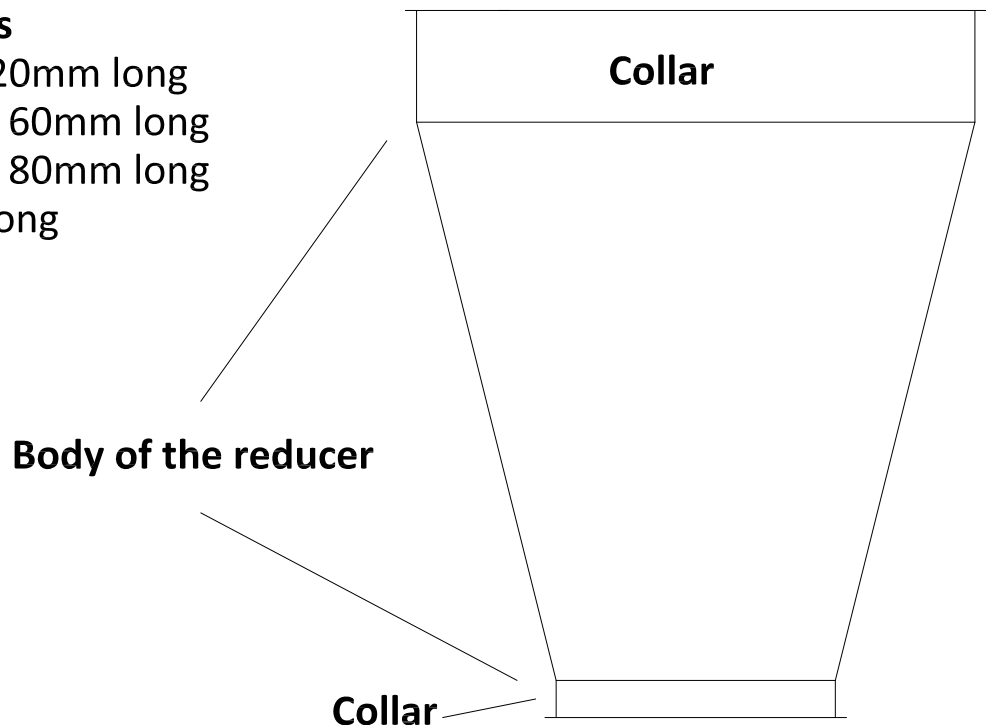

[www.ducting-express.co.uk](http://www.ducting-express.co.uk)

Designed to provide a smoother internal bore & simply clip the components together, Express Duct will save time on installation & make replacing parts simple. This ducting can be easily dismantled for cleaning purposes & replacing worn parts. The use of the quick clamps reduces leakage, this results in improved airflow.