


RS 150 10 | 134984

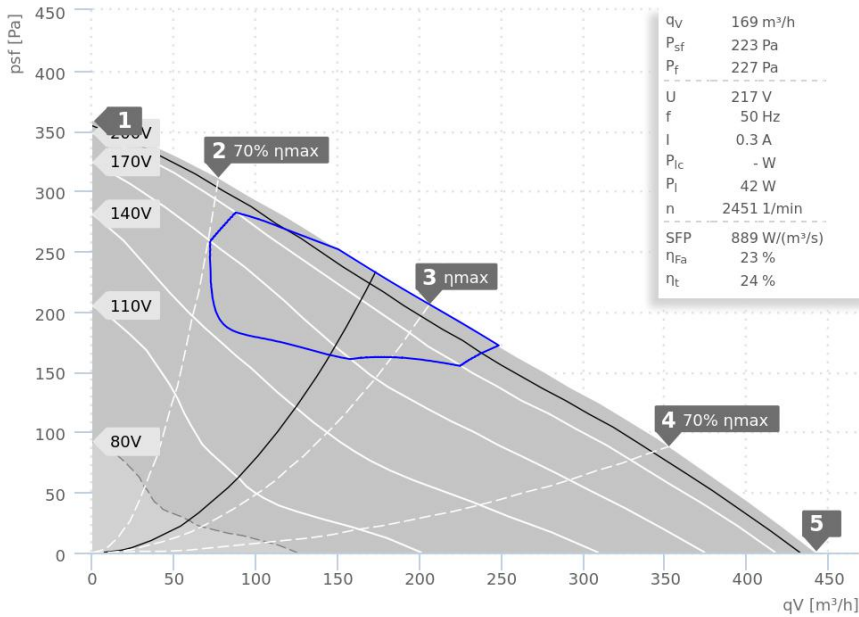

- Backward curved centrifugal fan
- Metal housing RAL 7035
- Speed controllable
- Integrated thermostatic switch
- Incl. terminal box

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	0,2	0,3	0,3	0,3	0,3
Power consumption P _i	W	33	39	46	48	46
Rotation speed n	1/min	2762	2664	2471	2430	2482
SWL inlet L _{WA5}	dB(A)	64	63	62	64	66
SWL outlet L _{WA6}	dB(A)	65	64	62	63	66
SWL casing break out L _{WA2}	dB(A)	52	51	49	49	51

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	62	36	43	48	55	57	56	52	44
Outlet	L _{WA6}	62	36	45	55	55	56	56	51	42
Housing radiation	L _{WA2}	50	34	33	39	43	45	43	37	27

RS 150 10 134984	
Voltage U _N	230 V 1~
Current I _{max}	0,3 A
Ambient temperature t _A	70 °C
Medium temperatures t _M	70 °C
Speed Control	V
Motor protection	TMI
Insulation class motor	F
Weight	3,2 kg
Number of poles	2
IP motor	IP33
IP terminal box	IP44
IP complete unit	IPX4
Min. operating temperature	-25 °C