


features & benefits

Mixed flow fan for duct mounting


For apartments, hotels, bathroom, utility or kitchen
Shockproof, heat resistant ABS UV resistant plastic,
finished in white (RAL 9010)

Two speed high, low operation and off switch
Single phase 220V to 240V 50Hz or 60Hz

curves

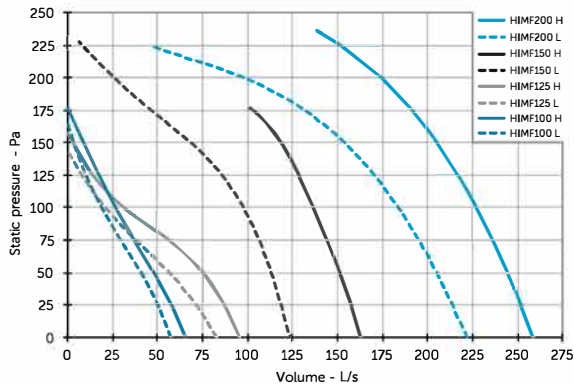

dimensional drawing

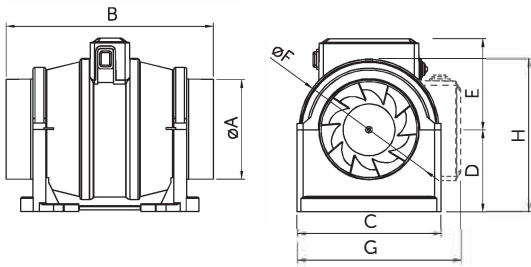

dimen...

	100	125	150	200
øA	97	124	147	198
B	296	256	298	310
C	179	179	194	254
D	104	102	109	129
E	113	113	127	146
øF	174	174	195	228
G	202	202	223	272
H	190	190	211	243
Weight (kg)	2.4	2.4	3.0	4.0

Dimensions in mm.

HIMF

Mixed Flow Fan



IP44
protection

50°C
temperature

product information

		HIMF			
		100	125	150	200
Airflow (L/s) max	High	65.6	95.7	163.2	258.9
	Low	57.4	82.6	124.4	222.3
Static Pressure (Pa) max	High	176	157	176	236
	Low	164	143	227	223
Power (W) max	High	32	34	69	120
	Low	32	33	58	106
Sound Pressure (dBA @ 3m)	High	45	44	55	53
	Low	44	43	50	51

accessories

	100	125	
Fixed Grille	HEG100	HEG125	
External Gravity Shutters	HES100	HES125	
Internal Extract Valve	HEV100	HEV125	
Internal Supply Valve	HSV100	HSV125	
3m Flexible Aluminium Duct	HFD100X3	HFD125X3	
		150	200
Fixed Grille	HEG150		
External Gravity Shutters	HES150		
Internal Extract Valve	HEV150	HEV200	
Internal Supply Valve	HSV150	HSV200	
3m Flexible Aluminium Duct	HFD150X3	HFD200X3	

HIMF with easi cable



Ready to run EASI models, supplied with 1.5 metres of flexible cable, two speed high / low & off switch, and fitted with a 13amp 3 pin plug.