


Metal Air Valves

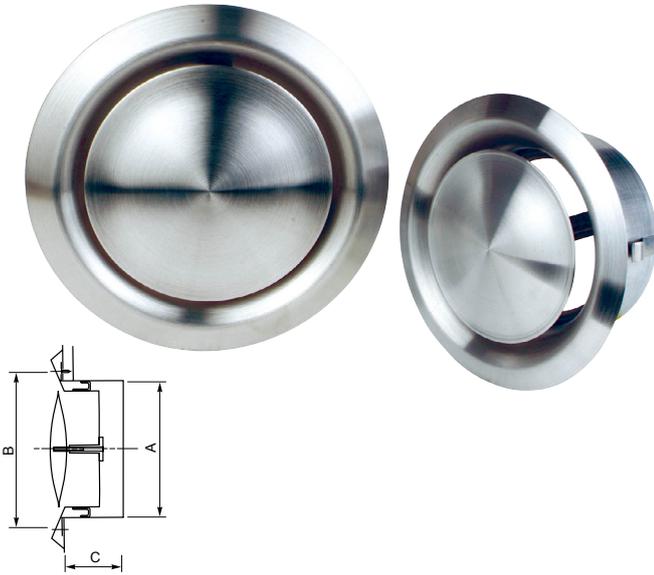

VS

- All Stainless steel 304 construction, excellent feature of antirust.
- Suitable for offices, houses, etc, easy installation on wall or in the ceiling.
- Distinguished good appearance.
- Applied for both return and supply air.
- The air flow is adjusted by rotating the control disc.
- Supplied with mounting ring.

VS	A	B	C	
80	75	97	40	100
100	97	118	52	60
125	120	141	52	30
150	145	162	62	24
160	155	172	62	24
200	195	228	74	24

Quick selection

Q	Type	100	125	150	160	200
30	Ps	15				
	X0.5	0.20				
40	Ps	25	11			
	X0.5	0.40	0.30			
60	Ps	53	23	3	2	
	X0.5	0.70	0.40	0.30	0.20	
80	Ps	100	51	10	8	
	X0.5	1.20	0.70	0.50	0.40	
130	Ps		139	25	22	43
	X0.5		1.50	1	0.90	1.10
190	Ps			56	48	56
	X0.5			1.80	1.60	1.60
220	Ps					114
	X0.5					2

Symbols and specifications

- Q = Air volume in m³/h
- X0.5 = Horizontal throw in m at end velocity of 0.5 m/s
- Ps = Static pressure in Pa